


## LED Lighting

## SAP12S-08 series Miniature Square Linear LED Fitting

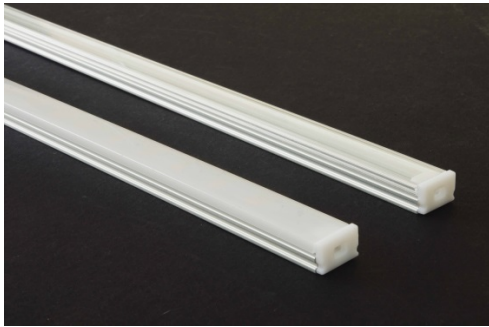

### Features

- 12x8.0mm slim-line lightweight aluminium profile
- Choice of length up to 2.0M
- High performance mid power LED emitters
- Safe, low voltage operation 12v or 24vdc
- Long life, low maintenance
- Choice of diffused or clear lens
- Choice of colours
- Choice of controllers for dimming etc.

The SAP12S-08 series compact flat linear LED fitting is constructed from anodised aluminium and is designed with high intensity LED emitters for a wide range of interior applications including shelf & cabinet illumination.

### Electrical & Optical Specifications

Series	Colour	Suffix	CCT °K	Voltage Vdc	Angle
SAP12S-08-xx	Pure White	PW	6000~6500K	12v or 24v	120°
	Neutral White	NW	5000K		
	Natural White	NAW	4000K		
	Warm White	WW	3000~3500K		

### Standard lengths


Part No	Overall dimensions	Lumen output Typ.	Voltage Vdc	Power	LED Qty.
SAP630x12SD-xx	630x12mm	990	12v or 24v	8W	45
SAP1000x12D-xx	1000x12mm	1800		14W	72

xx denotes led colour

Overall Lengths may be specified in increments of 40mm subject to MOQ

Suffix: D=Diffused, C=Clear lens

### Dimensions

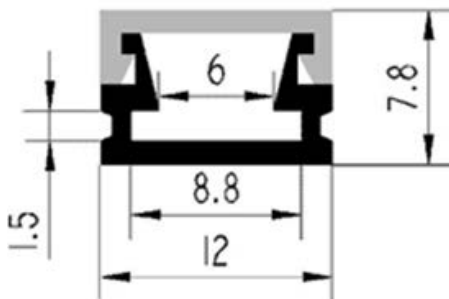

Terminated with 500mm input lead

Supplied with mounting clips for ease of installation

Use in conjunction with external constant voltage driver (see SNP series)

Custom lengths available on request (subject to MOQ's)

### Notes:

These units are designed for low voltage dc operation and must not be connected directly to ac mains  
Luminous Flux values quoted are typical. Please contact our office for the latest luminous intensity yields  
Specifications may be subject to change without notice