

LED Lighting

SAP23F-2002 series Flat Linear LED Fitting



Features

- 23.5x9.75mm slim-line lightweight aluminium profile
- Choice of length up to 2.0M
- High performance mid power LED emitters
- Safe, low voltage operation 12v or 24vdc
- Long life, low maintenance
- Choice of diffused or clear lens
- Choice of colours including RGB
- Choice of controllers for dimming etc.

The SAP23F-2002 series compact flat linear LED fitting is constructed from anodised aluminium and is designed with high intensity LED emitters for a wide range of interior applications including shelf & cabinet illumination.

Electrical & Optical Specifications

Series	Colour	Suffix	CCT °K	Voltage Vdc	Angle
SAP23F-2002-xx	Pure White	PW	6000~6500K	12v or 24v	120°
	Neutral White	NW	5000K		
	Natural White	NAW	4000K		
	Warm White	WW	3000~3500K		
SAP23F-2002-RGB	RGB	Red	620	24vdc	120°
		Green	520		
		Blue	470		

Standard lengths


Part No	Overall dimensions	Lumen output Typ.	Voltage Vdc	Power	LED Qty.
SAP500x23FD-xx	500x17mm	1368	12v or 24v	12.4W	72
SAP1000x23FD-xx	1000x17mm	2736		24.8W	144

xx denotes led colour

Overall Lengths may be specified in increments of 50mm subject to MOQ

Suffix: D=Diffused, C=Clear lens

Dimensions

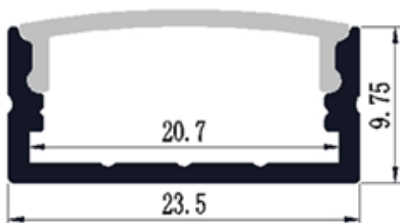

Terminated with 500mm input lead

Supplied with mounting clips for ease of installation

Use in conjunction with external constant voltage driver (see SNP series)

Custom lengths available on request (subject to MOQ's)

Notes:

These units are designed for low voltage dc operation and must not be connected directly to ac mains
Luminous Flux values quoted are typical. Please contact our office for the latest luminous intensity yields
Specifications may be subject to change without notice