


PHILIPS

Fortimo

LED

Fortimo SLM 1205
L13 2024 G7

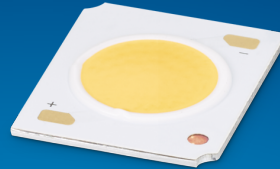

Datasheet

Experience bright and vivid colors

Fortimo LED SLM 1205 L13 2024 G7

Fortimo LED SLM Gen7 continues to focus on the combination of quality of light and performance. This results in an extensive portfolio of lumen ranges, CCTs and spectra. Please also check the online Easy Design-in Tool for your perfect system combination (www.na.easydesignintool.com).

Key features and benefits

- Best quality of light available for all applications
- Extensive range of CCTs
- Small LES for narrow beam angles and small reflector designs
- Flexibility to select a different lumen output between 800 and 10000 lm
- State of the art Chip-on-Board (CoB) technology, enabling highest system efficacy
- System proposition (CoB + Holder + driver)
- Flexibility to optimize luminaire performance (lm/W or high lm output)
- Xitanium window drivers with SimpleSet for maximum flexibility
- Five year system warranty with over 50,000 hours lifetime
- Instant full light

April 2019

Ordering data

Commercial product name	EOC	12NC	Box quantity
Fortimo SLM C 827 1205 L13 2024 G7	8718696 845660 00	9290 015 87806	20
Fortimo SLM C 830 1205 L13 2024 G7	8718696 845691 00	9290 015 87906	20
Fortimo SLM C 835 1205 L13 2024 G7	8718696 845721 00	9290 015 88006	20
Fortimo SLM C 840 1205 L13 2024 G7	8718696 845752 00	9290 015 88106	20
Fortimo SLM C 850 1205 L13 2024 G7	8718696 845783 00	9290 015 88206	20
Fortimo SLM C 927 1205 L13 2024 G7	8718696 845813 00	9290 015 88406	20
Fortimo SLM C 930 1205 L13 2024 G7	8718696 845844 00	9290 015 88506	20

Not all products are globally available by default.

Please contact your local Philips Lighting representative for local availability and activation.

Drive currents

Parameter	Nominal*	Life**	Max***	Unit
Fortimo SLM 1205 L13 2024 G7	500	870	1050	mA

Module temperatures

Parameter	Nominal*	Life**	Max***	Unit
T _c (case temperature at T _c point)	85	85	95	°C

* Nominal value at which typical performance is specified

** Value at which life time is specified

*** Maximum value for safe operation, do not operate above this value


Optical characteristics - table per color (CCT)

Fortimo SLM C 827 1205 L13 2024 G7

Parameter	Min	Typ	Max	Unit
Luminous flux	2286	2540	2794	lm
Module efficacy	133	148		lm/W
Correlated color temperature (CCT)		2700		K
Color coordinates (CIEx, CIEy)		(0.458, 0.410)		-
Color consistency			3	SDCM
CRI	80	82		
Photobiological safety			RG1 unlimited	
Energy efficiency label		A++		

Measurement precision for flux +/- 5%. Measurement precision for efficacy +/- 6%. Measurement precision for x, y +/- 0.005. Measurement precision for CRI +/- 1.5

Operation point	827	lm	lm/W
80% I-nom 400mA	Tc 25 °C	2277	165
	Tc-nom 85 °C	2091	155
	Tc-max 95 °C	2058	153
I-nom 500mA	Tc 25 °C	2789	159
	Tc-nom 85 °C	2540	148
	Tc-max 95 °C	2497	146
I-life 1050mA	Tc 25 °C	5214	130
	Tc-nom 85 °C	4651	118
	Tc-max 95 °C	4554	116

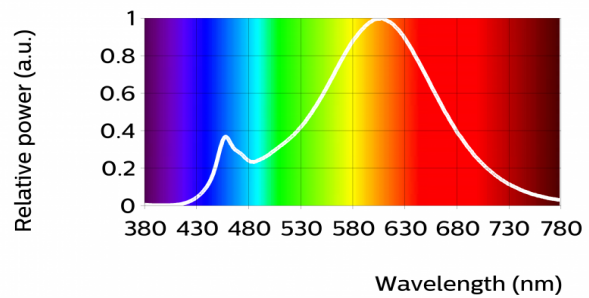


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
79	92	94	76	79	90	82	59	12	82	72	73	82	97

Fortimo SLM C 830 1205 L13 2024 G7

Parameter	Min	Typ	Max	Unit
Luminous flux	2376	2640	2904	lm
Module efficacy	139	154		lm/W
Correlated color temperature (CCT)		3000		K
Color coordinates (CIEx, CIEy)		(0.434, 0.403)		-
Color consistency			3	SDCM
CRI	80	82		
Photobiological safety			RG1 unlimited	
Energy efficiency label		A++		

Measurement precision for flux +/- 5%. Measurement precision for efficacy +/- 6%. Measurement precision for x, y +/- 0.005. Measurement precision for CRI +/- 1.5

Operation point	830	lm	lm/W
80% I-nom 400mA	Tc 25 °C	2366	172
	Tc-nom 85 °C	2173	161
	Tc-max 95 °C	2139	159
I-nom 500mA	Tc 25 °C	2898	165
	Tc-nom 85 °C	2640	154
	Tc-max 95 °C	2595	152
I-life 1050mA	Tc 25 °C	5420	135
	Tc-nom 85 °C	4836	123
	Tc-max 95 °C	4734	121

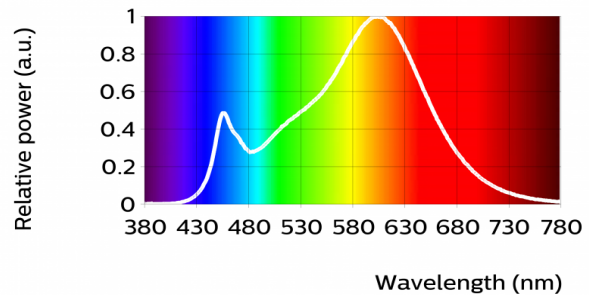

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
83	94	93	80	84	94	81	59	12	87	80	76	86	97


Fortimo SLM C 835 1205 L13 2024 G7

Parameter	Min	Typ	Max	Unit
Luminous flux	2421	2690	2959	lm
Module efficacy	141	157		lm/W
Correlated color temperature (CCT)		3500		K
Color coordinates (CIEx, CIEy)		(0.407, 0.392)		-
Color consistency			3	SDCM
CRI	80	82		
Photobiological safety			RG1 unlimited	
Energy efficiency label		A++		

At currents higher than 916 mA the module might be classified as RG2

Measurement precision for flux +/- 5%. Measurement precision for efficacy +/- 6%. Measurement precision for x, y +/- 0.005. Measurement precision for CRI +/- 1.5

Operation point	835	lm	lm/W
80% I-nom 400mA	Tc 25 °C	2411	175
	Tc-nom 85 °C	2214	164
	Tc-max 95 °C	2179	162
I-nom 500mA	Tc 25 °C	2953	169
	Tc-nom 85 °C	2690	157
	Tc-max 95 °C	2644	155
I-life 1050mA	Tc 25 °C	5524	137
	Tc-nom 85 °C	4928	125
	Tc-max 95 °C	4825	123

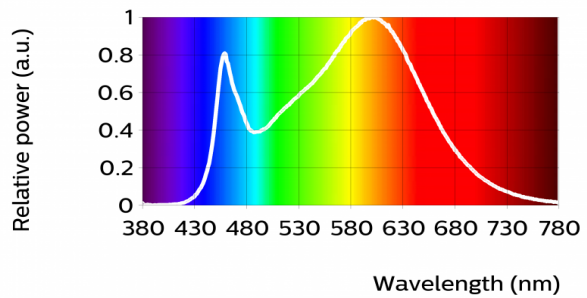

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
86	96	93	80	85	94	83	65	22	90	79	70	89	97


Fortimo SLM C 840 1205 L13 2024 G7

Parameter	Min	Typ	Max	Unit
Luminous flux	2475	2750	3025	lm
Module efficacy	144	160		lm/W
Correlated color temperature (CCT)		4000		K
Color coordinates (CIEx, CIEy)		(0.382, 0.380)		-
Color consistency			3	SDCM
CRI	80	82		
Photobiological safety			RG1 unlimited	
Energy efficiency label		A++		

At currents higher than 735 mA the module might be classified as RG2

Measurement precision for flux +/- 5%. Measurement precision for efficacy +/- 6%. Measurement precision for x, y +/- 0.005. Measurement precision for CRI +/- 1.5

Operation point	840	lm	lm/W
80% I-nom 400mA	Tc 25 °C	2464	179
	Tc-nom 85 °C	2263	168
	Tc-max 95 °C	2228	166
I-nom 500mA	Tc 25 °C	3019	172
	Tc-nom 85 °C	2750	160
	Tc-max 95 °C	2703	158
I-life 1050mA	Tc 25 °C	5649	141
	Tc-nom 85 °C	5040	128
	Tc-max 95 °C	4934	126

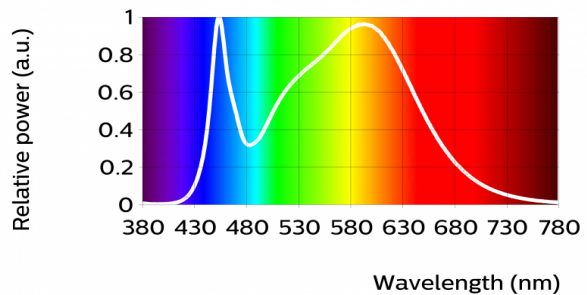

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
84	96	91	77	83	93	81	62	13	90	77	67	88	96


Fortimo SLM C 850 1205 L13 2024 G7

Parameter	Min	Typ	Max	Unit
Luminous flux	2475	2750	3025	lm
Module efficacy	144	160		lm/W
Correlated color temperature (CCT)		5000		K
Color coordinates (CIEx, CIEy)		(0.345, 0.355)		-
Color consistency			3	SDCM
CRI	80	82		
Photobiological safety			RG1 unlimited	
Energy efficiency label		A++		

At currents higher than 544 mA the module might be classified as RG2

Measurement precision for flux +/- 5%. Measurement precision for efficacy +/- 6%. Measurement precision for x, y +/- 0.005. Measurement precision for CRI +/- 1.5

Operation point	850	lm	lm/W
80% I-nom 400mA	Tc 25 °C	2464	179
	Tc-nom 85 °C	2263	168
	Tc-max 95 °C	2228	166
I-nom 500mA	Tc 25 °C	3019	172
	Tc-nom 85 °C	2750	160
	Tc-max 95 °C	2703	158
I-life 1050mA	Tc 25 °C	5649	141
	Tc-nom 85 °C	5040	128
	Tc-max 95 °C	4934	126

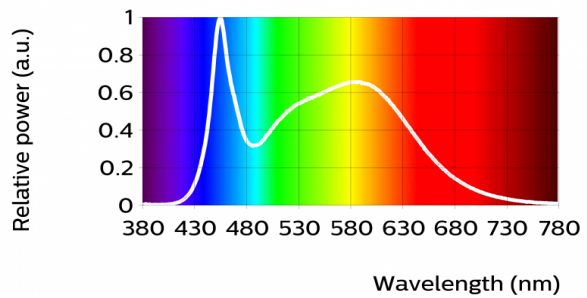


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
83	92	95	80	82	87	86	68	14	79	78	58	86	98

Fortimo SLM C 927 1205 L13 2024 G7

Parameter	Min	Typ	Max	Unit
Luminous flux	1899	2110	2321	lm
Module efficacy	111	123		lm/W
Correlated color temperature (CCT)		2700		K
Color coordinates (CIEx, CIEy)		(0.458, 0.410)		-
Color consistency			3	SDCM
CRI	90	92		
Photobiological safety			RG1 unlimited	
Energy efficiency label		A++		

Measurement precision for flux +/- 5%. Measurement precision for efficacy +/- 6%. Measurement precision for x, y +/- 0.005. Measurement precision for CRI +/- 1.5

Operation point	927	lm	lm/W
80% I-nom 400mA	Tc 25 °C	1892	137
	Tc-nom 85 °C	1737	129
	Tc-max 95 °C	1710	128
I-nom 500mA	Tc 25 °C	2317	132
	Tc-nom 85 °C	2110	123
	Tc-max 95 °C	2074	122
I-life 1050mA	Tc 25 °C	4327	108
	Tc-nom 85 °C	3860	98
	Tc-max 95 °C	3779	96

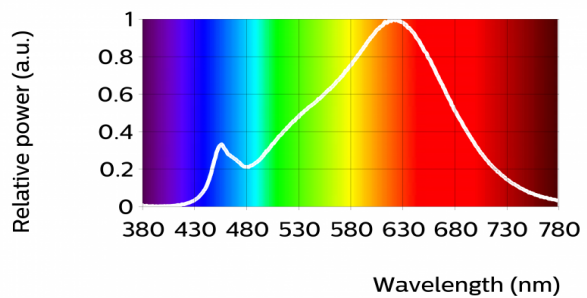


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
92	98	98	92	93	97	91	81	60	94	93	83	95	100

Parameter	Min	Typ	Max	Unit
Luminous flux	1971	2190	2409	lm
Module efficacy	115	128		lm/W
Correlated color temperature (CCT)		3000		K
Color coordinates (CIEx, CIEy)		(0.434, 0.403)		-
Color consistency			3	SDCM
CRI	90	92		
Photobiological safety			RG1 unlimited	
Energy efficiency label		A++		

Measurement precision for flux +/- 5%. Measurement precision for efficacy +/- 6%. Measurement precision for x, y +/- 0.005. Measurement precision for CRI 1.5


Operation point	930	lm	lm/W
80% I-nom 400mA	Tc 25 °C	1963	143
	Tc-nom 85 °C	1803	134
	Tc-max 95 °C	1775	132
I-nom 500mA	Tc 25 °C	2404	137
	Tc-nom 85 °C	2190	128
	Tc-max 95 °C	2153	126
I-life 1050mA	Tc 25 °C	4492	112
	Tc-nom 85 °C	4007	102
	Tc-max 95 °C	3923	100

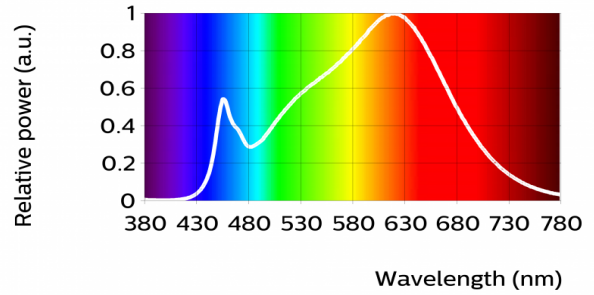


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
94	98	99	92	93	96	91	83	62	94	92	79	95	99

Beam shape


Bare CoB

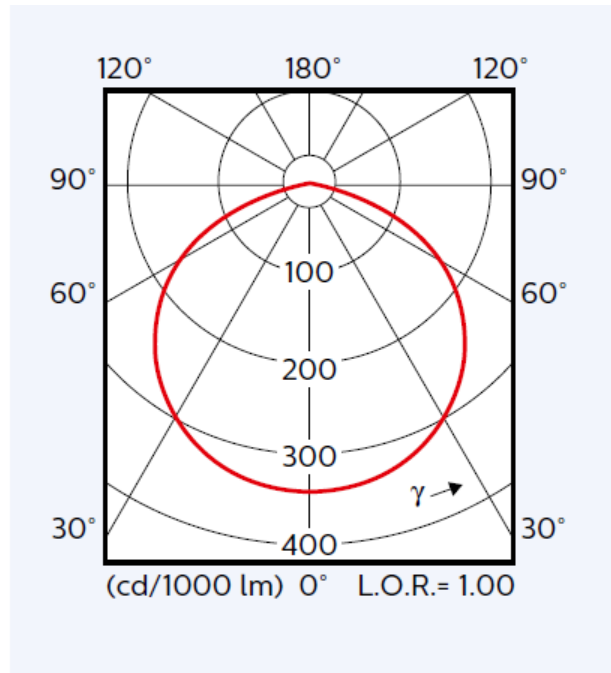

CoB with a standard/ down-light/ Zhaga poke-in holder

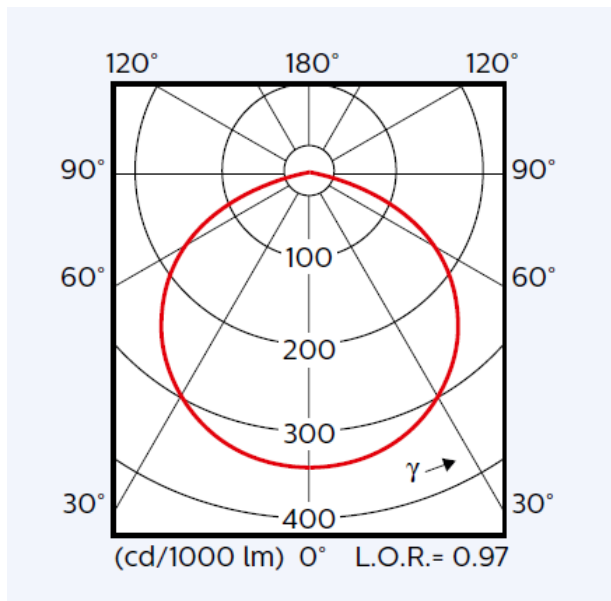

CoB with a poke-in holder

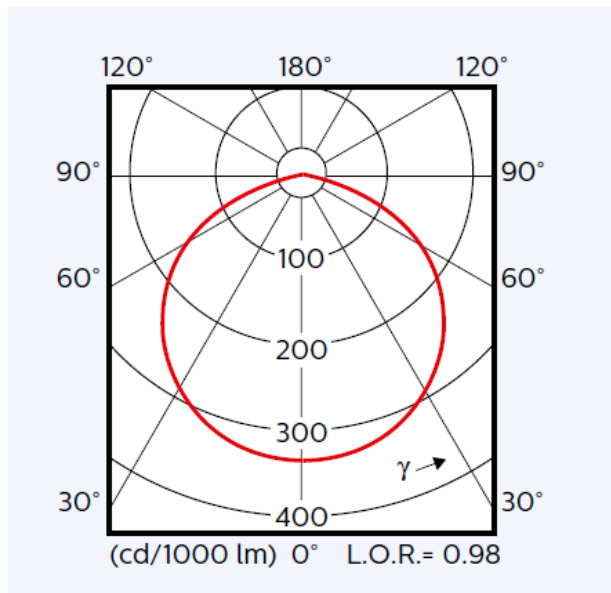


[Fortimo SLM C 827 1205 L13 2024 G7](#)
[Fortimo SLM C 830 1205 L13 2024 G7](#)
[Fortimo SLM C 835 1205 L13 2024 G7](#)
[Fortimo SLM C 840 1205 L13 2024 G7](#)
[Fortimo SLM C 850 1205 L13 2024 G7](#)
[Fortimo SLM C 927 1205 L13 2024 G7](#)
[Fortimo SLM C 930 1205 L13 2024 G7](#)

Parameter	Min	Typ	Max	Unit
Forward voltage	31.8	34.3	36.8	V
Power consumption	15.9	17.2	18.4	W

Tuning information


Flux and efficacy versus current (at Tc nominal)

I [mA]	Flux [%]	Efficacy [%]
1050	183	80
775	144	89
500	100	100
400	82	105
250	54	113

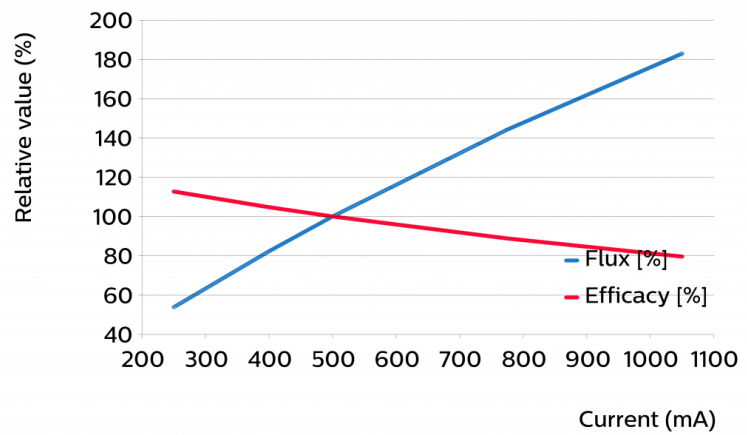

Flux and efficacy versus temperature at Tc (at I nominal)

Tcase [°C]	Flux [%]	Efficacy [%]
95	98	99
85	100	100
25	110	107
0	114	110

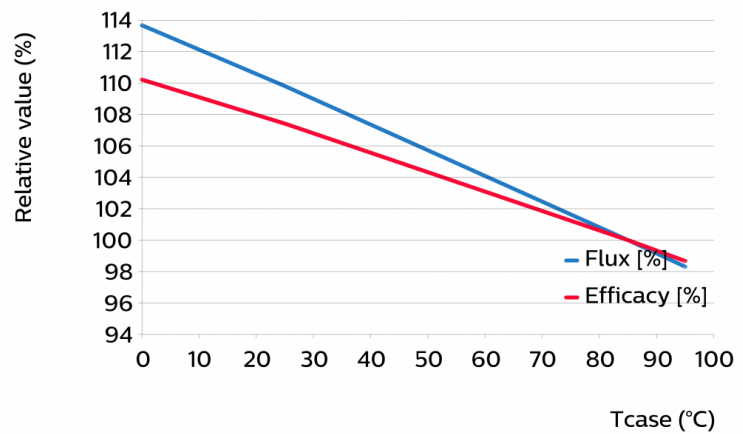

Lumen maintenance

Operation point	Lumen maintenance x 1000 hours	L70			L80			L90		
		B50	B20	B10	B50	B20	B10	B50	B20	B10
80% Inom 400 mA	Tc 65°C	>50	>50	>50	>50	>50	>50	>50	>50	41
	Tc nom 85°C	>50	>50	>50	>50	48	39	35	23	18
	Tc max 95°C	>50	>50	42	>50	33	26	24	16	12
Inom 500 mA	Tc 65°C	>50	>50	>50	>50	>50	>50	>50	47	38
	Tc nom 85°C	>50	>50	>50	>50	44	35	32	21	17
	Tc max 95°C	>50	48	39	46	30	24	22	13	11
Ilife 830 mA	Tc 65°C	>50	>50	>50	>50	>50	>50	49	32	26
	Tc nom 85°C	>50	50	40	47	31	25	22	15	12
	Tc max 95°C	>50	35	28	33	22	17	16	10	8

Lifetime


Parameter	Value	Unit
C10 at Tc life	50000	hours

Please refer to the performance window to ensure that your operating conditions are covered.
 >50 k hours claim is based on extrapolating raw LM80-data by using statistical techniques.
 Switching cycles >15000.

Mechanical characteristics

Fortimo SLM C 827 1205 L13 2024 G7
 Fortimo SLM C 830 1205 L13 2024 G7
 Fortimo SLM C 835 1205 L13 2024 G7
 Fortimo SLM C 840 1205 L13 2024 G7
 Fortimo SLM C 850 1205 L13 2024 G7
 Fortimo SLM C 927 1205 L13 2024 G7
 Fortimo SLM C 930 1205 L13 2024 G7

Parameter	Min	Typ	Max	Unit
Length	23.8	24	24.2	mm
Width	19.8	20	20.2	mm
Height PCB	0.9	1	1.1	mm
Height including dam	1.2	1.5	1.8	mm

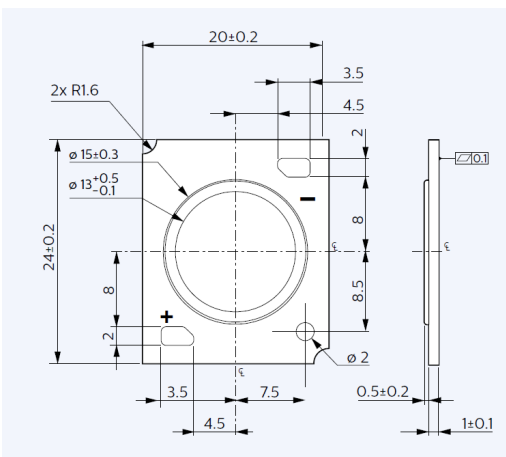

Absolute ratings

Parameter	Min	Typ	Max	Unit
Current through the LED module (I-max)			1050	mA
Case temperature (Tc-max)			95	°C
Power at rated Vf-max and I-max			41.3	W
ESD (direct contact)			8	kV
Ambient temperature	-20		40	°C
Storage temperature	-40		80	°C

Application information

Certificates and Standards

UL 8750

ENEC+

CE


Environmental

RoHS/REACH

Application

IP rating	No IP-rating
Overheating protection	No
Luminaire class	IEC Class I and Class II
Dimming	Yes

Performance Window

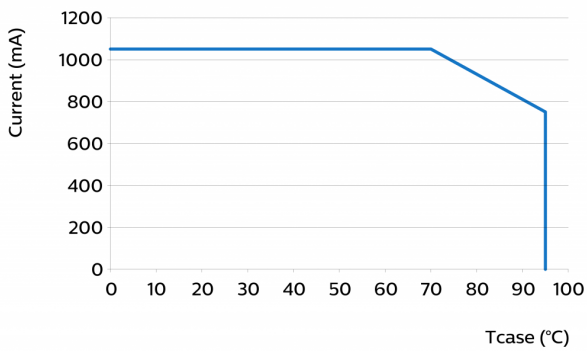



© 2019 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

Signify North America Corporation
200 Franklin Square Drive,
Somerset, NJ 08873
Telephone 855-486-2216

Signify Canada Ltd.
281 Hillmount Road,
Markham, ON, Canada L6C 2S3
Telephone 800-668-9008

www.signify.com/ledmodules